



SCH20

SIMAG

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



6 kg of Ice
300 cubes

Type of ice

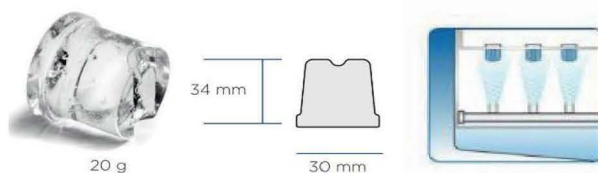

Voltage

230/50/1 Standard version

Machine dimensions

Net size WxDxH	333 x 457 x 599 mm
Net weight	28 kg
Shipping size WxDxH	400 x 530 x 690 mm
Shipping weight	33 kg

Technology and Certifications




**Factory 12, Sandown Square
56 Smith Road
Springvale Vic 3171**



SCH20

SIMAG

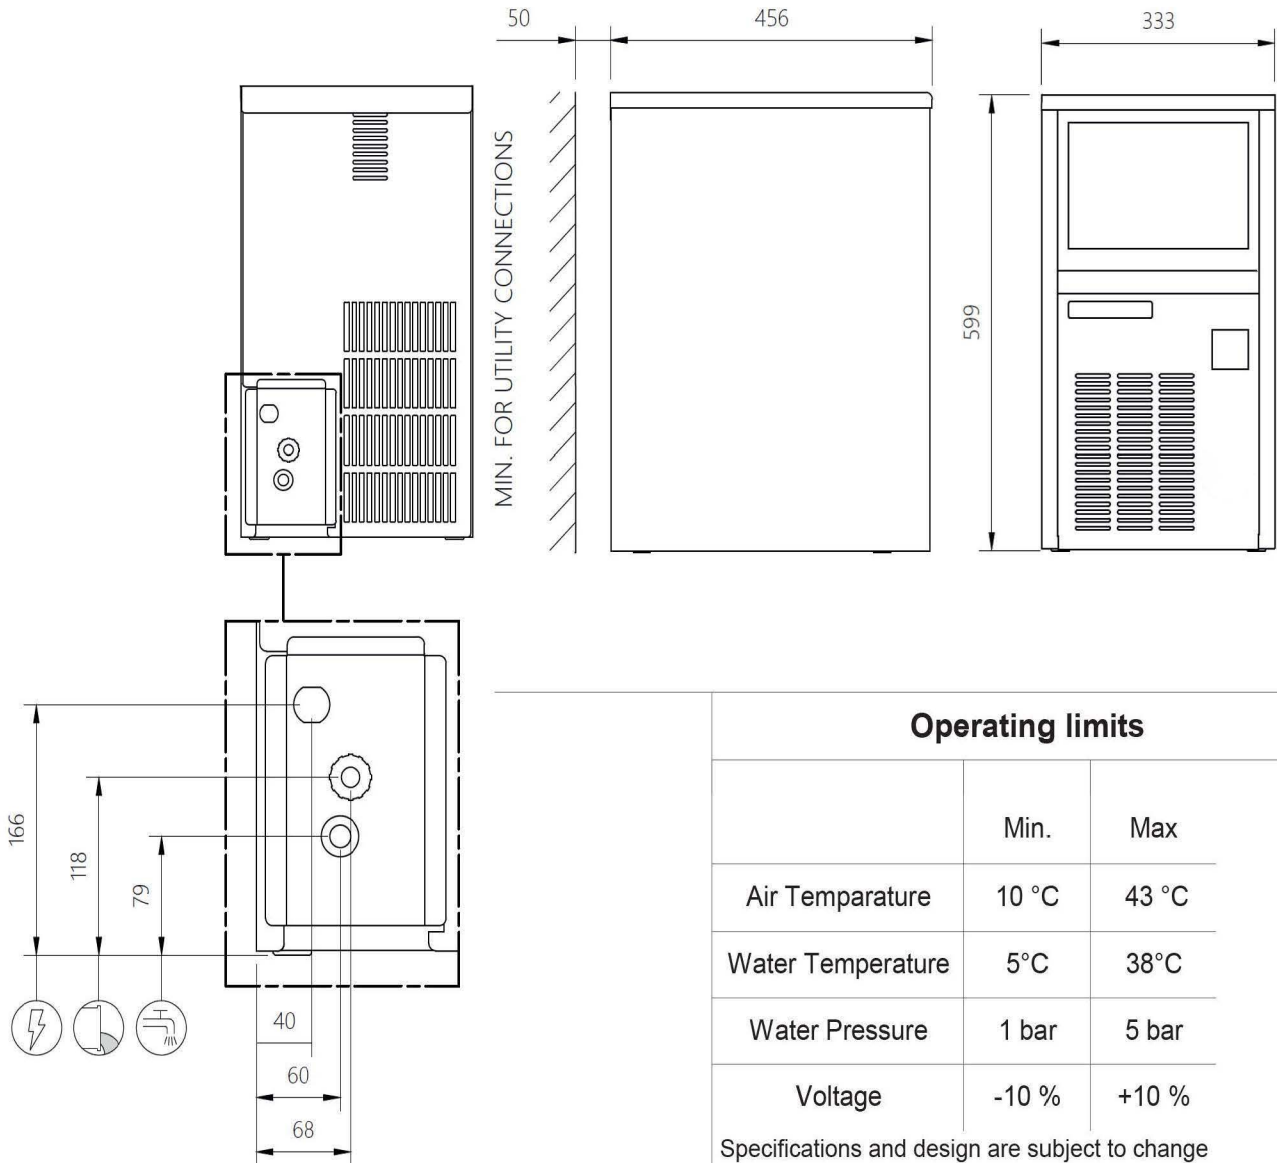

Operating limits		
	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/100kg	kWh/ 24h	Water l/h
SCH20	230/50/1	20	18,5	250	R290	0,075	10	32,3	4,2	3,9

(**) Water Consumption: at 32°C Air and 21°C Water

(*) Power Input: at 43°C Ambient Temperature