



# SDH64



## Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290



## Internal bin capacity




20 kg of ice

950 cubes

## Type of ice

Hollow Cubes

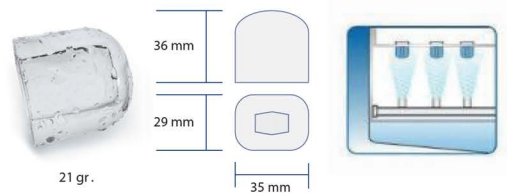

## Machine dimensions

## Voltage

230/50/1 Standard version

Net size WxDxH 485 x 575 x 805 mm

Net weight 48 kg

Shipping size WxDxH 550 x 640 x 940 mm

Shipping weight 57 kg


## Technology and Certifications



**Factory 12 Sandown Square  
56 Smith Rd  
Springvale Vic 3171**



# SDH64

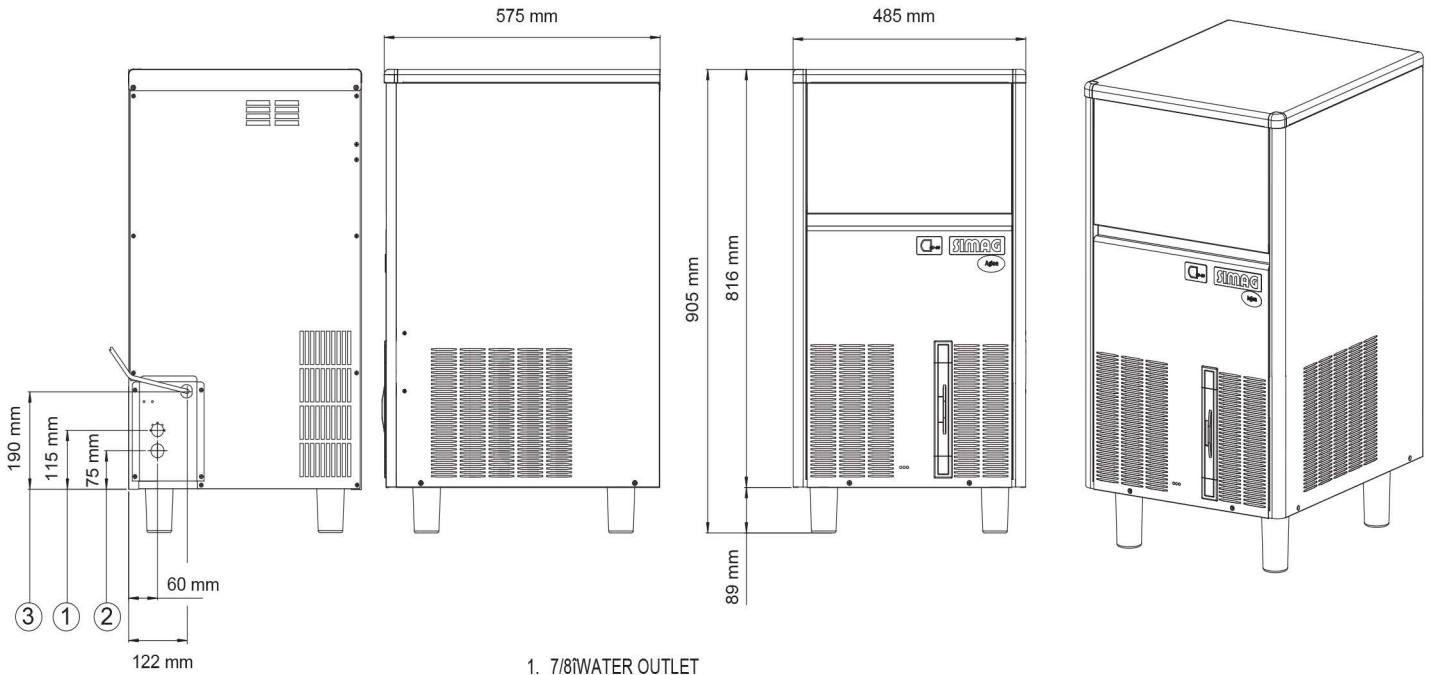

1. 7/8" WATER OUTLET
2. 3/4" GAS WATER INLET
3. CORD SET

DRAINAGE PER GRAVITY

## Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h
SDH 64	230/50/1	58	54	460	R290	0.130	10	19.78	8.9	5.0

(\*\*) Water Consumption: at 32°C

(\*) Power Input: at 43°C Ambient Temperature