



DISP-125



FEATURES

- Compact ice or ice & water automatic dispenser, with appealing, contemporary "touch-screen" design.
- Push Button activated.
- Possible to set ice only or ice & water on site and desired ice dosage.
- Fast & friendly cleaning mode for the end user.
- Full frontal visibility of settings and errors for preventative service check.
- Natural refrigerant R290 propane.

DXN 187
Cubelet 1 g
L 16 x P 15 x H 7-8 mm



CONDENSING
SYSTEM
Air cooled

REFRIGERANT GAS
R290

VOLTAGE
V/HZ/PH
230\50\1




Self Contained Ice Machine 125 kg



DISP-125

SIMAG

Self Contained Ice Machine 125 kg

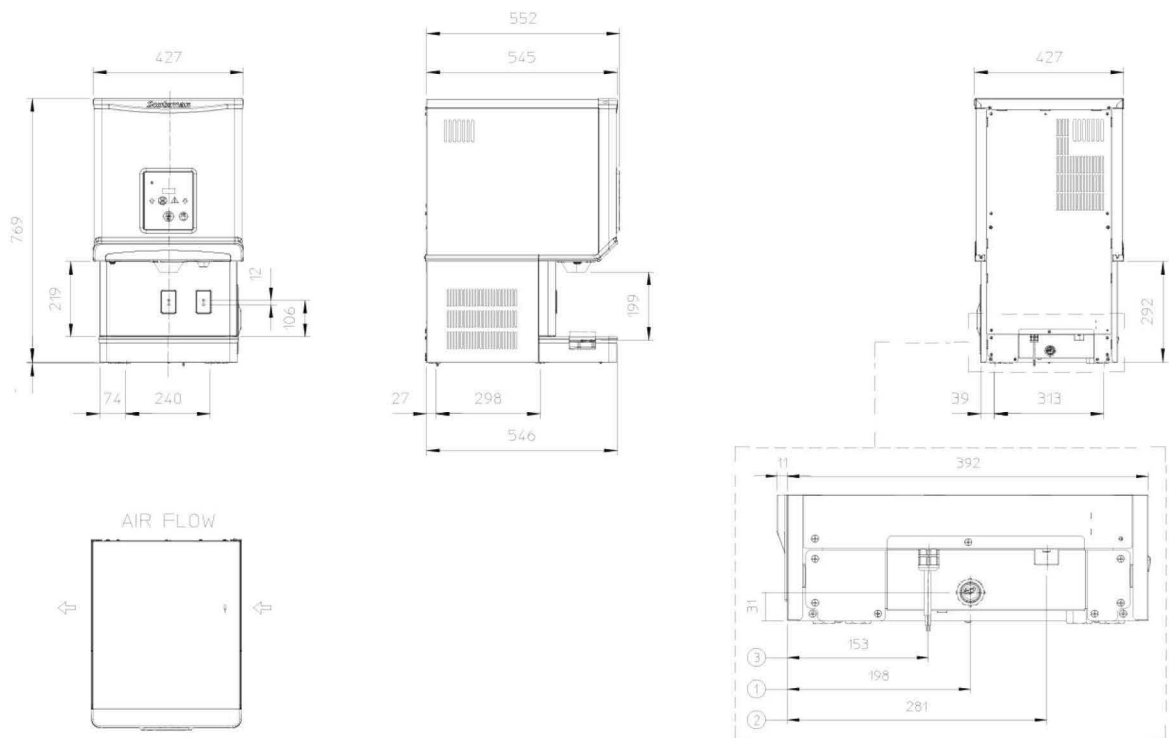

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			427 x 552 x 769 mm			Size (W x D x H)			790 x 610 x 490 mm			
Net weight			49 kg			Gross weight			56kg			
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	W	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
DISP-125	230\50\1	A	140	125	95	7	1,2 kw	12,6	4	530	3 x 0,0	10

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	38
Water temperature	5	38
Water pressure	1 bar (14 psi)	35 bar (70 psi)
Electrical voltage	-10%	+10%